




Solid State Angular Rate Gyro ARS-G152 Specifications

Description:

The ARS-G152 is Watson's newest addition to its line of rate gyro sensors.

Watson Industries has been designing and manufacturing solid-state gyros since 1980. The ARS-G152 Rate gyro has many of the features from our Pro Gyro® line but includes many exciting new capabilities including digital output and several analog output ranges. Users can still take advantage of this gyro's built-in test feature and enhanced EMI/RFI protection.

The ARS-G152 has excellent performance for stability, acceleration insensitivity, and vibration rejection. This is achieved by having a sensing element that is finely tuned and temperature compensated. Other significant advancements have been made on the ARS-G152. A menu system allows for adjustable sensor bandwidth. The analog rate output can also be toggled between unipolar and bipolar using menu adjustments.

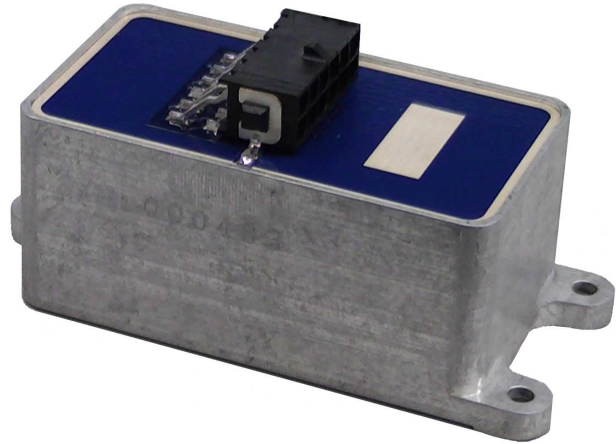

ARS-G152 features:

- High reliability
- Wide bandwidth (Adjustable!)
- Low drift
- Digital RS-232 Serial output
- Four Analog outputs present:
50, 100, 200, and 400°/s ranges
- Accurate in severe environments
- Low noise
- Two-year warranty

Applications:

- Aircraft flight instrumentation and control
- Platform stabilization (antenna, camera, etc.)
- Robotics
- Short-term navigation
- Vehicle test instrumentation
- Train tilt controls

Watson Industries ARS-G152 Analog Outputs

<u>Output</u>	<u>Format</u>	<u>Range</u>	<u>Output</u>	<u>Zero Ref (0°/sec)</u>	<u>Scale Factor</u>	<u>Resolution</u>
50	Unipolar	±50°/sec	0 to 5 VDC	2.5 VDC	20°/sec/Volt	0.006°/sec
	Bipolar	±50°/sec	±5 VDC	0.0 VDC	10°/sec/Volt	0.006°/sec
100	Unipolar	±100°/sec	0 to 5 VDC	2.5 VDC	40°/sec/Volt	0.012°/sec
	Bipolar	±100°/sec	±5 VDC	0.0 VDC	20°/sec/Volt	0.012°/sec
200	Unipolar	±200°/sec	0 to 5 VDC	2.5 VDC	80°/sec/Volt	0.024°/sec
	Bipolar	±200°/sec	±5 VDC	0.0 VDC	40°/sec/Volt	0.024°/sec
400	Unipolar	±400°/sec	0 to 5 VDC	2.5 VDC	160°/sec/Volt	0.05°/sec
	Bipolar	±400°/sec	±5 VDC	0.0 VDC	80°/sec/Volt	0.05°/sec



Watson Industries, Inc.

3035 Melby Street Eau Claire, Wisconsin 54703 U.S.A
Phone: +1 (715) 839-0628 Fax: +1 (715) 839-8248
e-mail: support@watson-gyro.com Website: www.watson-gyro.com

Watson ARS-G152 Specifications

Angular Rate

Ranges:	$\pm 50^\circ/\text{sec}$	$\pm 100^\circ/\text{sec}$	$\pm 200^\circ/\text{sec}$	$\pm 400^\circ/\text{sec}$
Resolution:	$0.006^\circ/\text{sec}$	$0.012^\circ/\text{sec}$	$0.024^\circ/\text{sec}$	$0.05^\circ/\text{sec}$
Analog Scale Factor:	Bipolar Unipolar	$100\text{mV}/^\circ/\text{sec}$ $50\text{mV}/^\circ/\text{sec}$	$50\text{mV}/^\circ/\text{sec}$ $25\text{mV}/^\circ/\text{sec}$	$25\text{mV}/^\circ/\text{sec}$ $12.5\text{mV}/^\circ/\text{sec}$
Scale Factor Accuracy:		0.2%		At constant room temperature
Scale Factor Temp Coefficient:		0.1%		Over temperature range
Bias:		$\pm 0.1^\circ/\text{sec}$		At room temp
Bias: Over Temp Range		$\pm 0.2^\circ/\text{sec}$		
Warmup Drift:		$\pm 0.25^\circ/\text{sec}$		
Non-Linearity:		$< 0.15\%$		Full scale range
Bandwidth:		70 Hz (Typical)		User selectable 5 to 200 Hz
Noise:		$< 0.05^\circ/\text{sec rms}$		1 Hz to 100 Hz

Environmental

Temperature: Operating	-40°C to $+85^\circ\text{C}$	
Temperature: Storage	-55°C to $+85^\circ\text{C}$	
Vibration: Operating	5g rms	20 Hz to 2 KHz
Vibration: Survival	10g rms	20 Hz to 2 KHz
Shock: Survival	500g	10mS ½ sine wave

Electrical


Frame Rate:	250 Hz	Maximum
Startup Time: Data	5 sec	
Startup Time: Fully operational	10 sec	
Input Power:	8 to 45VDC	0.7W
Input Current:	45mA @ 12VDC	20mA @ 24VDC
Digital Output:	RS-232	± 399.99 Range
Analog Output:	User Selectable	$\pm 5\text{VDC}$ Bipolar ; $0-5\text{VDC}$ Unipolar
Analog Output Impedance:	300 Ohm	Per line

Physical

Size: Including Mounting Flanges	1.2"W x 2.8"L x 1.35"H	3.0 x 7.1 x 3.0 (cm)
Weight:	2.1 oz	60 grams
Connection:	Amp 4-794627-2 (12 pin)	

- Specifications are subject to change without notice.
- This product may be subject to export restrictions. Export Classification ECCN 7A994

Dimensions:

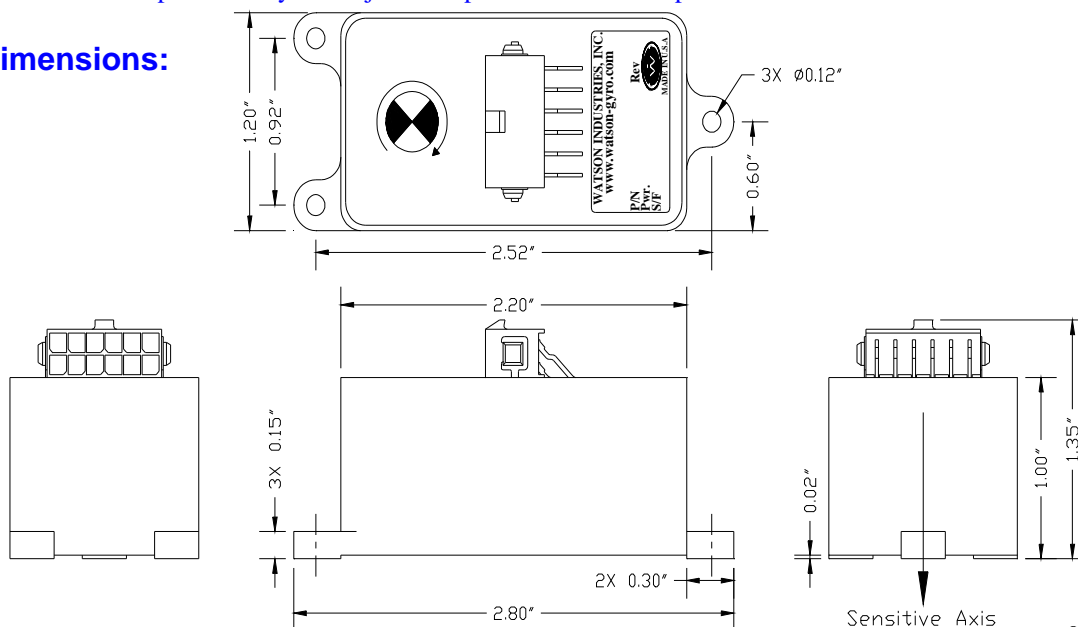

Watson Industries, Inc.

3035 Melby Street Eau Claire, Wisconsin 54703 U.S.A
 Phone: +1 (715) 839-0628 Fax: +1 (715) 839-8248
 e-mail: support@watson-gyro.com Website: www.watson-gyro.com